

B19

SINGLE ROW SHROUDED HEADER (WITH POLARIZATION)

PITCH: 2.54mm

SPECIFICATIONS

Material

Insulator : PBT, glass reinforced, rated UL 94V-0

Contact : Brass

Electrical









Current Rating : 1 Amp

Contact Resistance : 30 mΩ max.


Insulation Resistance : 3000 MΩ min.

Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40°C to +105°C

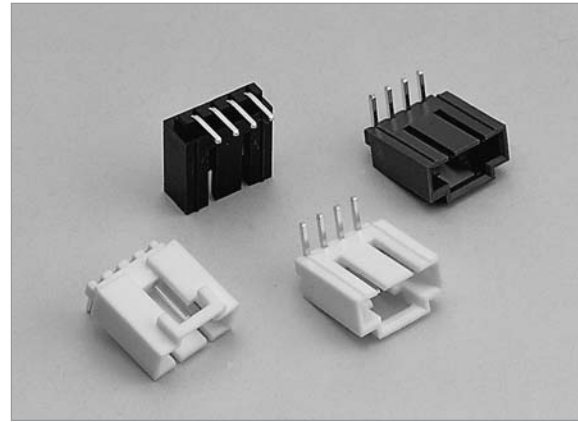

RECOMMENDED P.C.B. LAYOUT



RECOMMENDED P.C.B. LAYOUT

HOW TO ORDER:

B19 - - - - -

| 1.NO. OF CONTACT | 2.CONTACT MATERIAL | 3.CONTACT PLATING | 4.MOUNTING TYPE | 5.INSULATOR COLOR |
|--|--------------------|---|-------------------------------|-------------------|
| 02 03 04 05 06 07 08 09 10 11 12 | A: BRASS | T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD | S: STRAIGHT R: RIGHT ANGLE | 1. BLACK |