

B28b

FEMALE HEADER (1.27mm * 1.27mm) PROFILE : 2.0mm SMT TYPE

PITCH: 1.27mm

SPECIFICATIONS

Material

Insulator : Nylon 6T, glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze

Electrical

Current Rating : 0.5 Amp


Contact Resistance : 30 mΩ max.

Insulation Resistance : 1000 MΩ min.





Dielectric Withstanding Voltage : 250V AC for 1minute

Operating Temperature : -40°C to +105°C

♦ Mating Suggestion : C11, C11a, C12 & C12a series.

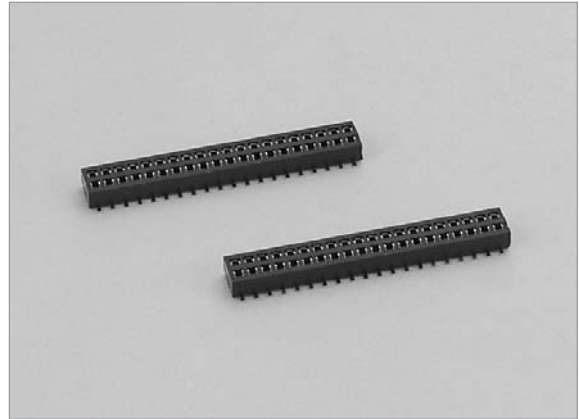

B

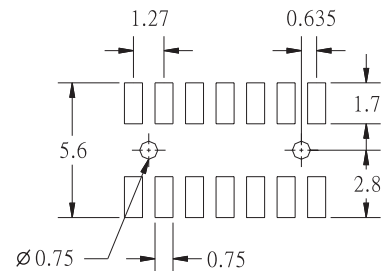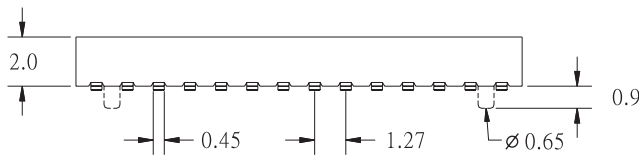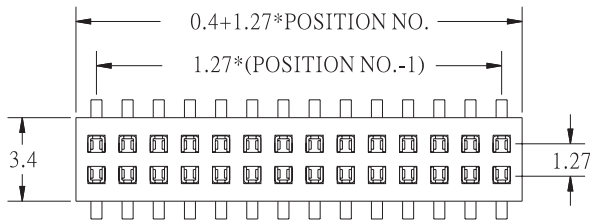

RECOMMENDED P.C.B LAYOUT

HOW TO ORDER:

B28b - - - - -

| 1.NO. OF CONTACT | 2.CONTACT MATERIAL | 3.CONTACT PLATING | 4.SPECIAL FUNCTION | 5.INSULATOR COLOR |
|------------------------|--------------------|---|---|-------------------|
| DUAL ROW 2*2 - 2*30 | B: PHOSPHOR BRONZE | T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD | A: WITH LOCATING PEG B: W / O LOCATING PEG | 1. BLACK |