






E20

SCSI - II CENTRONIC PCB RIGHT ANGLE

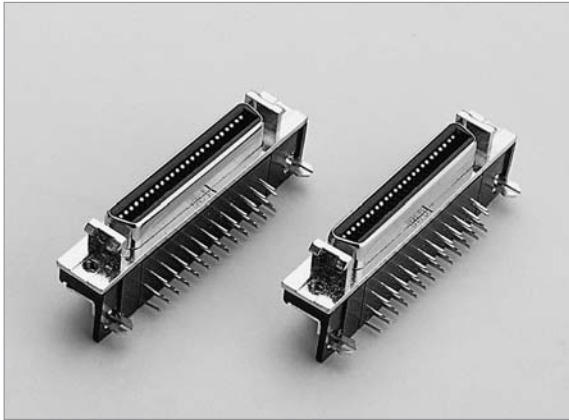


POSITION	A	B	C	D	E
14F	12.84	23.64	29.79	17.24	7.62
26F	20.46	31.26	37.41	24.86	15.24
50F	35.70	46.50	52.65	40.10	30.48

POSITION	A	B	C	D	E
20F	16.65	27.45	33.60	21.05	11.43
36F	26.81	37.61	43.76	31.21	16.51
40F	29.35	40.15	46.30	33.75	24.13
60F	42.05	52.85	59.00	46.45	36.83
68F	47.13	57.93	64.80	51.53	41.93
80F	54.75	65.55	71.70	59.15	49.53
100F	67.45	78.25	84.40	71.85	62.23

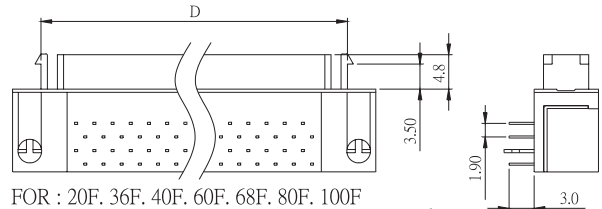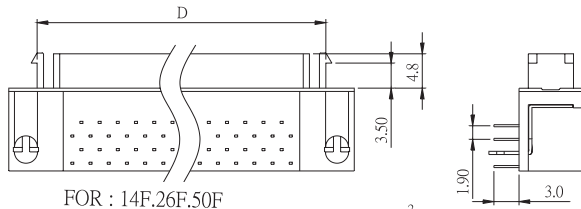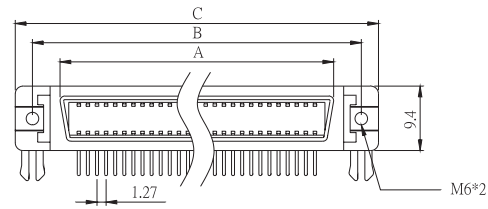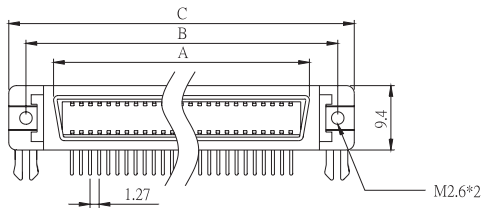


FOR : 14F.26F.50F

FOR : 20F. 36F. 40F. 60F. 68F. 80F. 100F

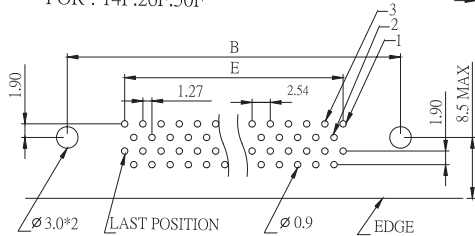

LAYOUT FOR : 14F. 26F. 50F.

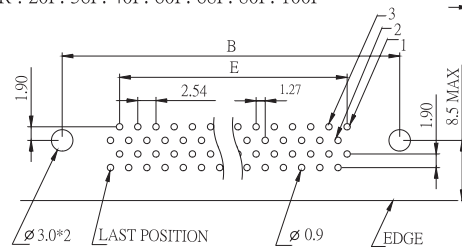

LAYOUT FOR : 20F. 36F. 40F. 60F. 68F. 80F. 100F

E

HOW TO ORDER:

E20- 1 - 2 - 3 - 4 - 5 - 6 - 7 - 8

1.NO. OF CONTACT	2.CONTACT TYPE	3.CONTACT PLATING	4.SHELL OPTION
14 20 26 36 40 50 60 68 80 100	F: FEMALE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	A: METAL SHELL
5.MOUNTING METHOD	6.PARTS OPTION	7.BOARDLOCK OPTION	8.INSULATOR COLOR
A: THREAD INSERT 2-56 UNC B: THREAD INSERT 4-40 UNC C: THREAD INSERT M3 D: THREAD INSERT M2.6	A: WITH FRONT LATCH B: WITHOUT FRONT LATCH	A: BOARDLOCK (Z-SHAPE) B: L-SHAPE	1. BLACK