

# L01d

## JACKETED FLAT CABLE 1.27mm

UL Style : 20081

Operating Temperature : -20°C to +80°C

Flammability Rating : UL-CL-2

Voltage Rating : 300V

### Physical

Insulation Material : Polyvinyl Chloride (PVC)

Conductor : #28AWG (7\*0.127) Stranded Tinned Copper

#26AWG (7\*0.16) Stranded Tinned Copper

Color : Grey With Red Edge

### Electrical


Impedance : 95Ω (Unbalanced)

Capacitance : 15.5 pF/ft.

Inductance : .14μH/ft

Propagation Delay : 1.47 ns/ft.

Insulation Resistance : 1GΩ/M min.

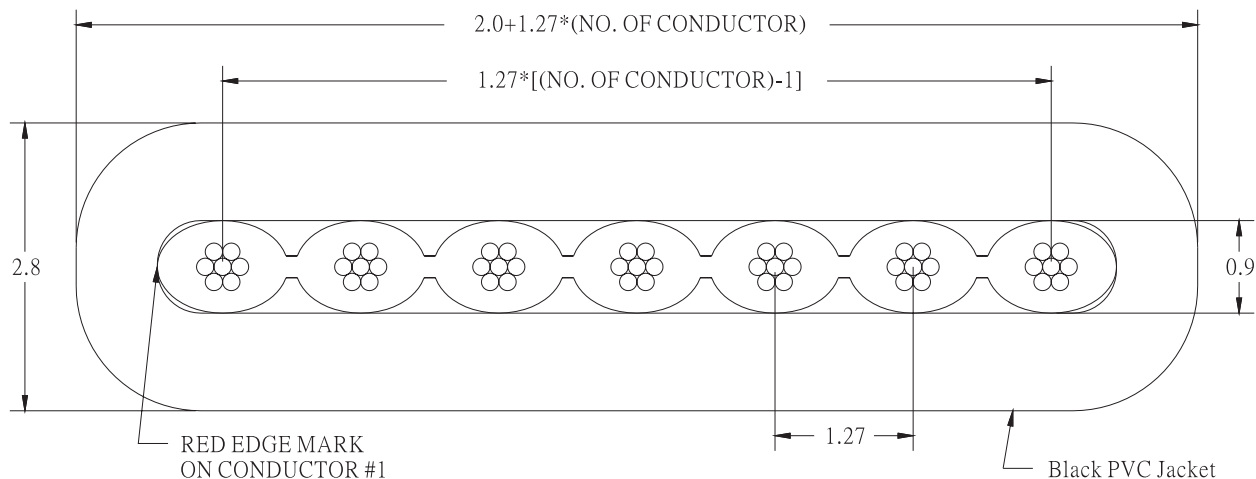

L

### HOW TO ORDER:

L01d -  1 -  2 -  3 -  4 /UNIT

1.NO. OF CONDUCTOR	2.INSULATION MATERIAL	3.WIRE SIZE	4.CABLE LENGTH / UNIT
09 TO 64	P: PVC	A: 28 AWG B: 26 AWG	C: CM F: FEET I: INCH M: METER