

B06d FEMALE HEADER WITH POLARIZATION BUMP

PROFILE : 8.4mm STRAIGHT

PITCH: 2.54mm

SPECIFICATIONS

Material

Insulator : PBT, glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze or Brass

Electrical

Current Rating : 1 Amp



Contact Resistance : 30 mΩ max.

Insulation Resistance : 3000 MΩ min.


Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40°C to +105°C





◆ Mating Suggestion : C03, C03b, C03c, C03e, C04 & C04a series.

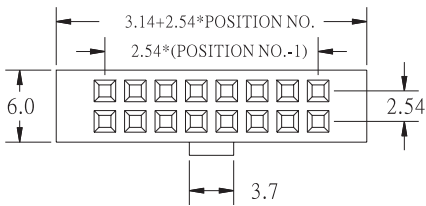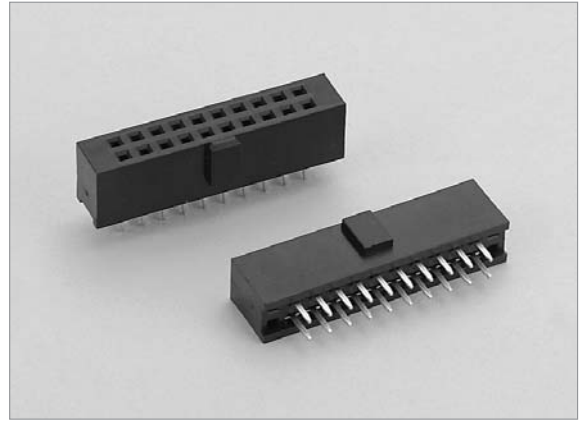


(TYPE A)

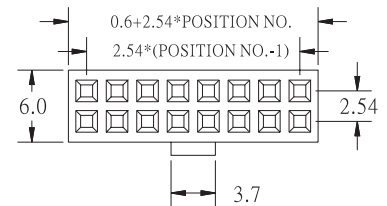

(TYPE B)

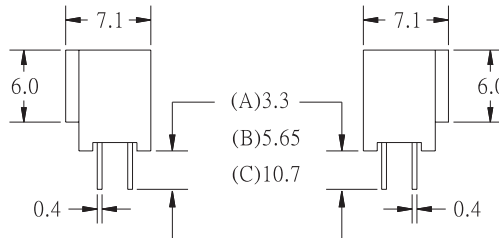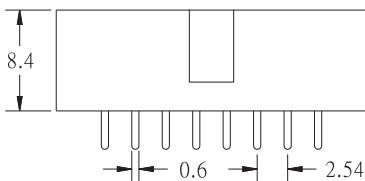

RECOMMENDED P.C.B LAYOUT



RECOMMENDED P.C.B LAYOUT

HOW TO ORDER:

B06d - 1 - 2 - 3 - 4 - 5 - 6

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.INSULATOR TYPE	5.PIN LENGTH	6.INSULATOR COLOR
06 08 10 12 14 16 20 24 26 30 34 40 44 50 60 64	A: BRASS B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	A: TYPE A B: TYPE B	A: 3.3mm B: 5.65mm C: 10.7mm	1. BLACK